THIS DOCUMENT IS PROPERTY OF HEATFOR SRL. IT MAY NOT BE REPRODUCED OR TRANSMITTED (TOTAL OR PARTIAL) WITHOUT ITS WRITTEN PERMISSION.

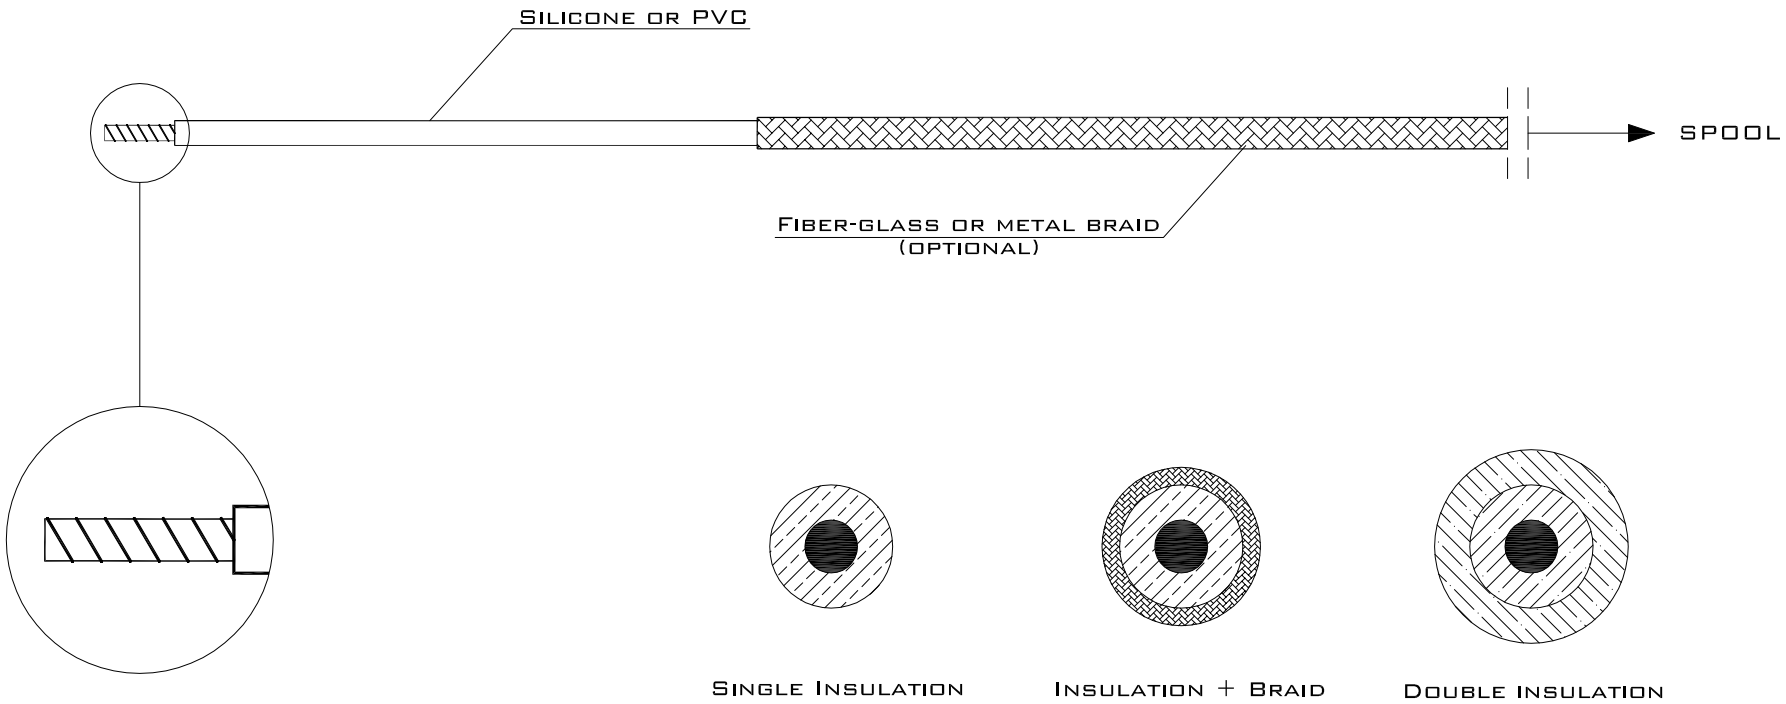

ELECTRICAL FEATURES

DIELECTRIC STRENGTH:	1500Vx1s - (2500Vx1s FOR CLASS II)
INSULATION CLASS:	I OR II (DOUBLE INSULATION)
OHMIC VALUES:	0.50÷15000 OHM/M

PHYSICAL FEATURES

MINIMUM THICKNESS:	0.6MM
MINIMUM DIAMETER:	2.2MM (WITHOUT BRAID)
MAXIMUM DIAMETER:	6.0MM
MAX TEMPERATURE:	180°C (SILICONE) - 85°C (PVC)
EXTERNAL PROTECTION:	FIBRE-GLASS OR METAL BRAID

STANDARD

QUALITY CONFORMITY:	CE
ROHS	ACCORDANT
DIMENSIONAL TOLERANCE:	EN ISO 22768 - C
STANDARD OF REFERENCE:	EN 60335-1 - EN50106

CE

REV.	DESCRIZIONE - DESCRIPTION	DRAW	CHECK	DATE

DESCRIZIONE - *DESCRIPTION* SILICONE HEATING CABLE	CLIENTE - *CUSTOMER* HEATFOR SRL	SCALA *SCALE* 1 : 1
DISEGNATORE - *DRAWER* AG		
APPROVAZIONE - *APPROVAL* GM	CODICE ARTICOLO HEATFOR - *HEATFOR ITEM* TO DEFINE	
DATA *DATE* 07/02/2017		
Heatfor	CODICE ARTICOLO CLIENTE - *CUSTOMER ITEM* TO DEFINE	

IL PRESENTE DOCUMENTO È PROPRIETÀ DI HEATFOR SRL. NE È VIETATA LA RIPRODUZIONE E LA TRASMISSIONE (TOTALE O PARZIALE) SENZA AUTORIZZAZIONE SCRITTA.

THIS DOCUMENT IS PROPERTY OF HEATFOR SRL. IT MAY NOT BE REPRODUCED OR TRANSMITTED (TOTAL OR PARTIAL) WITHOUT ITS WRITTEN PERMISSION.

IL PRESENTE DOCUMENTO È PROPRIETÀ DI HEATFOR SRL. NE È VIETATA LA RIPRODUZIONE E LA TRASMISSIONE (TOTALE O PARZIALE) SENZA AUTORIZZAZIONE SCRITTA.