



Specification: **BS-2072**

- \* Metal magnetic contacts
- \* Ideal for securing chain link fence
- \* Bracket included
- \* Longer cable available
- \* Weather resistant aluminum housing
- \* Switches or magnets are available separately
- \* 2 Conductor jacket cable on request(BS-2072J)
- \* Ideal for securing chain link fence
- \* Resistor, Diode and Supervisory Loop available on request

... Surface Mounted

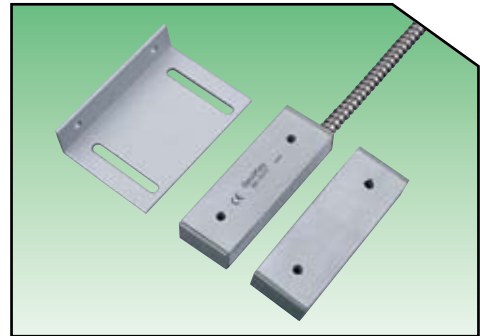

Dimension (mm):

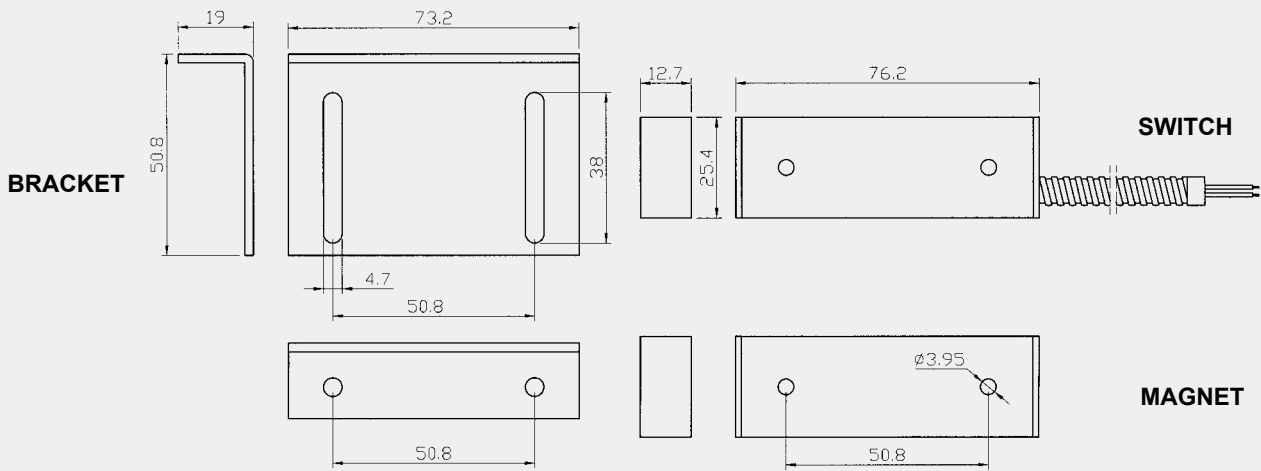

Order Information:

Part Number	Loop Type	Reed Form	Closed Gap [Inch(mm)]	Depature Gap [Inch(mm)]	Maximum Initial Contact Resistance (Ohm)	Maximum Contact Rating (W)	Maximum Switching Voltage (VDC/VAC)	Maximum Switching Current (A)
BS-2072	Closed	N/O	2.95 (75)	3.18 (80)	0.150	7.5	100	0.4
BS-2072WG	Closed	N/O	3 <sup>1</sup> / <sub>2</sub> (90)	3.75 (95)	0.150	7.5	100	0.4
BS-2072A	Open	N/C	2 <sup>1</sup> / <sub>2</sub> (65)		0.150	3	30	0.2
BS-2072C	Closed & Open	SPDT	2 <sup>1</sup> / <sub>2</sub> (65)		0.150	3	30	0.2
BS-2072D	DPDT	2SPDT	2 <sup>1</sup> / <sub>2</sub> (65)		0.150	3	30	0.2

\* These magnetic contact switches shall be installed so that a door or other movable opening cannot be opened more than 2 inches (51mm) without initiating an alarm. Switches exceeding 2 inches can not be installed per UL681-the Standard for installation and Classification of Burglar and Holdup Alarm